

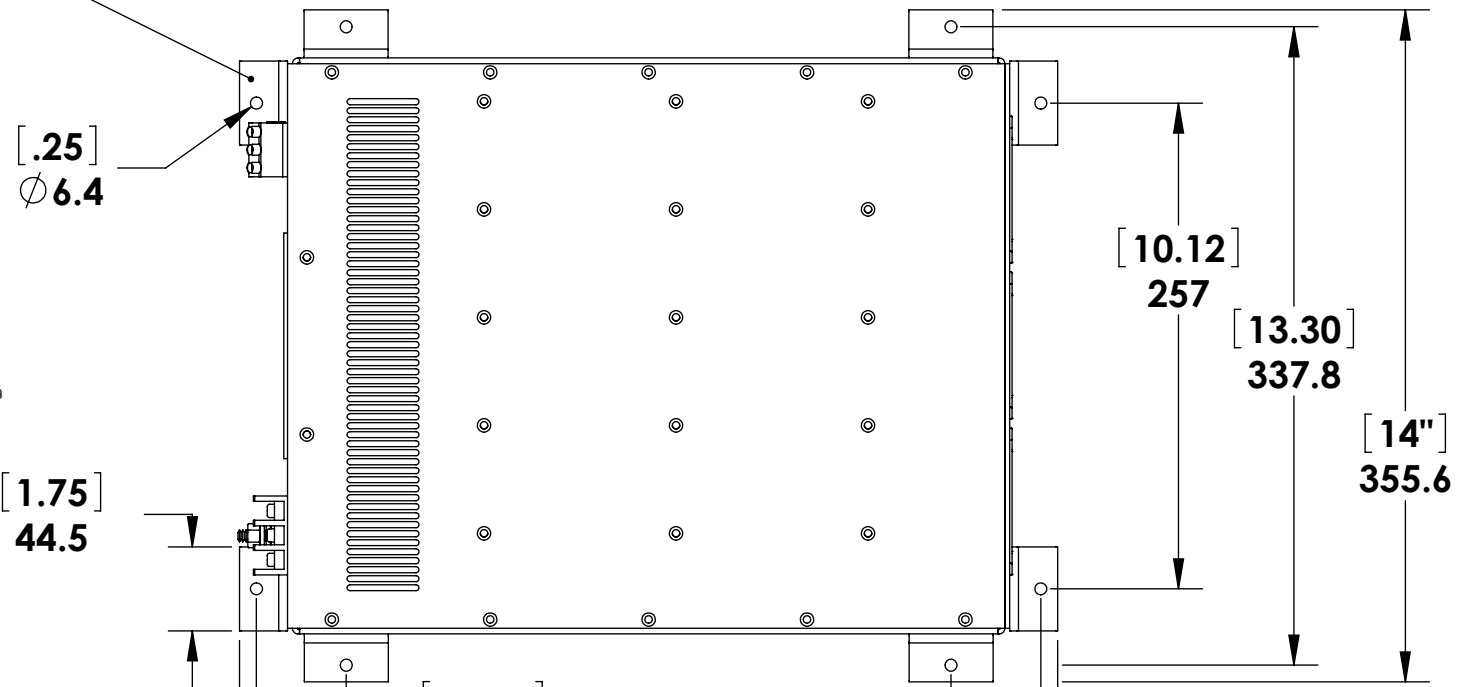
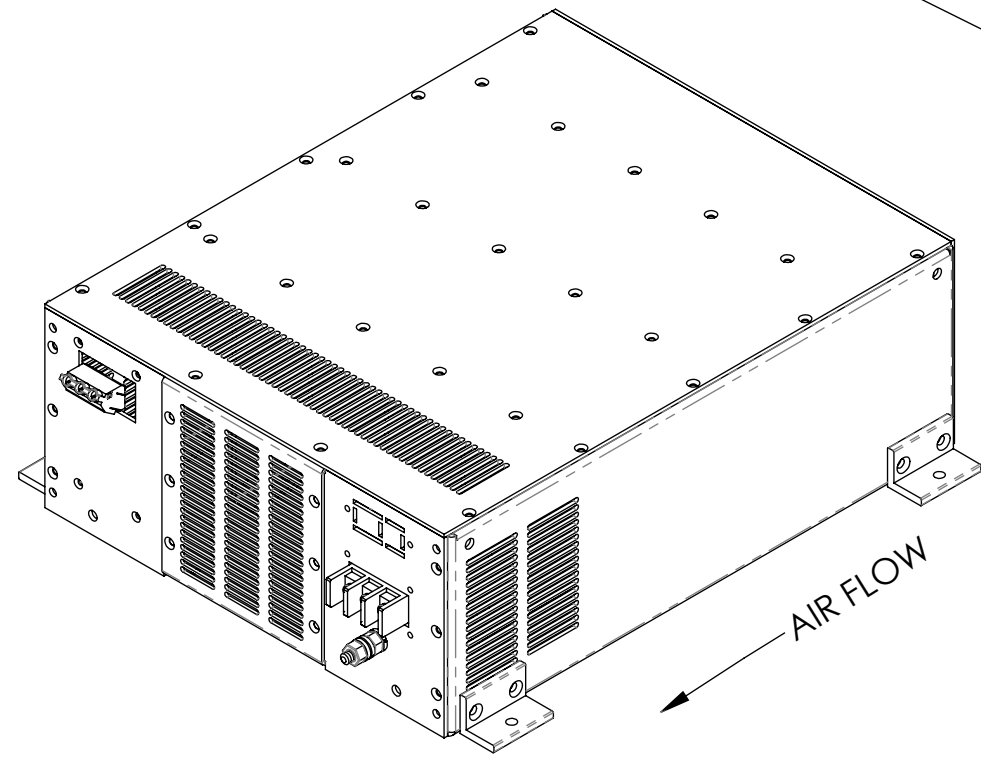


Mounting brackets can be installed along short or long sides - 4 mounting brackets with fasteners are provided with the unit

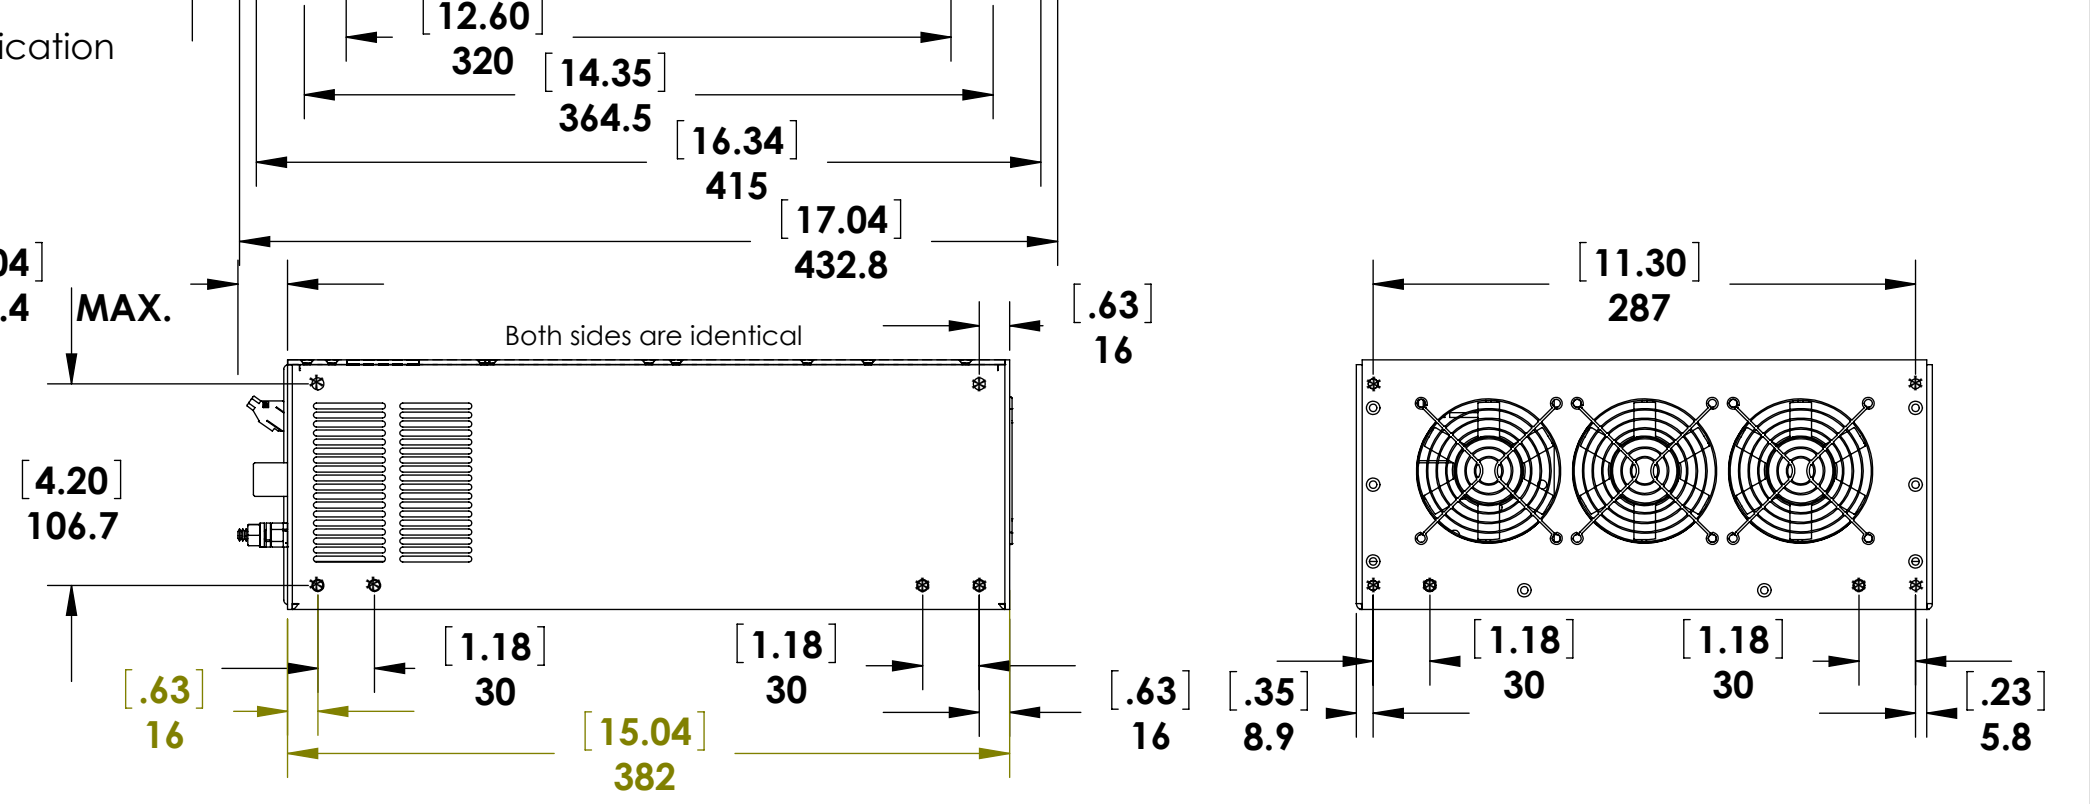

Type of Input / Output terminations are depends on application

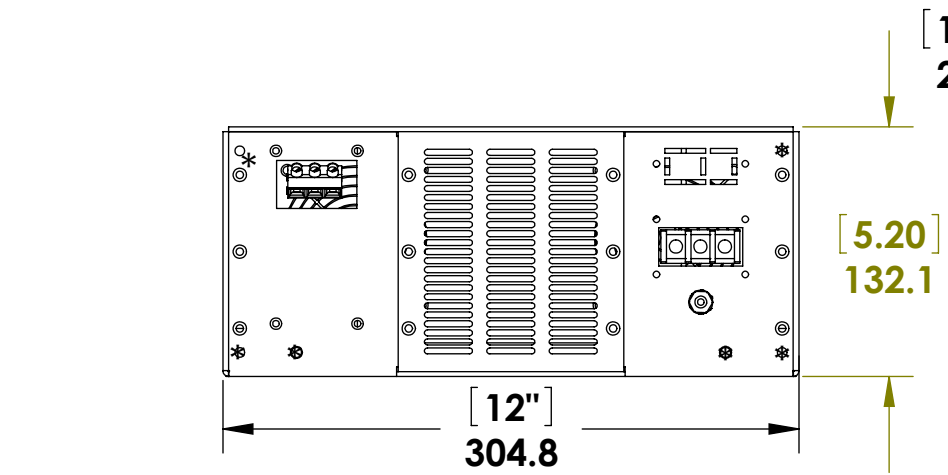

*M5 Threaded inserts for mounting brackets or for alternative mounting options
Maximum screw penetration is 10mm from outside surface of chassis

REV	DESCRIPTION:	DATE	DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMALS: XXX ± 0.008" XX ± 0.012"	THIS DOCUMENT IS THE PROPERTY OF ABSOPULSE ELECTRONICS LTD. ITS CONTENTS ARE PROPRIETARY AND MAY NEITHER BE COPIED, REPRODUCED NOR ITS CONTENTS DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN AGREEMENT FROM ABSOPULSE ELECTRONICS LTD.	Title: OUTLINE DRAWING				ABSOPULSE
A	NEW ISSUE	04/11/2014			Part of: 3U5 CHASSIS MOUNT PACKAGE				
			EDGES & HOLES DEBURRED SURFACES FREE OF SCRATCHES	ANGLES: ± 2° FRACTIONS: ± 1/64" UNLESS OTHERWISE STATED	Drawn by: J.X.	Checked by:	Approved by:	Revision:	Drawing No: ODR XXXXXX