


**APPROVED**  
By document1 at 4:38 pm, Oct 03, 2012

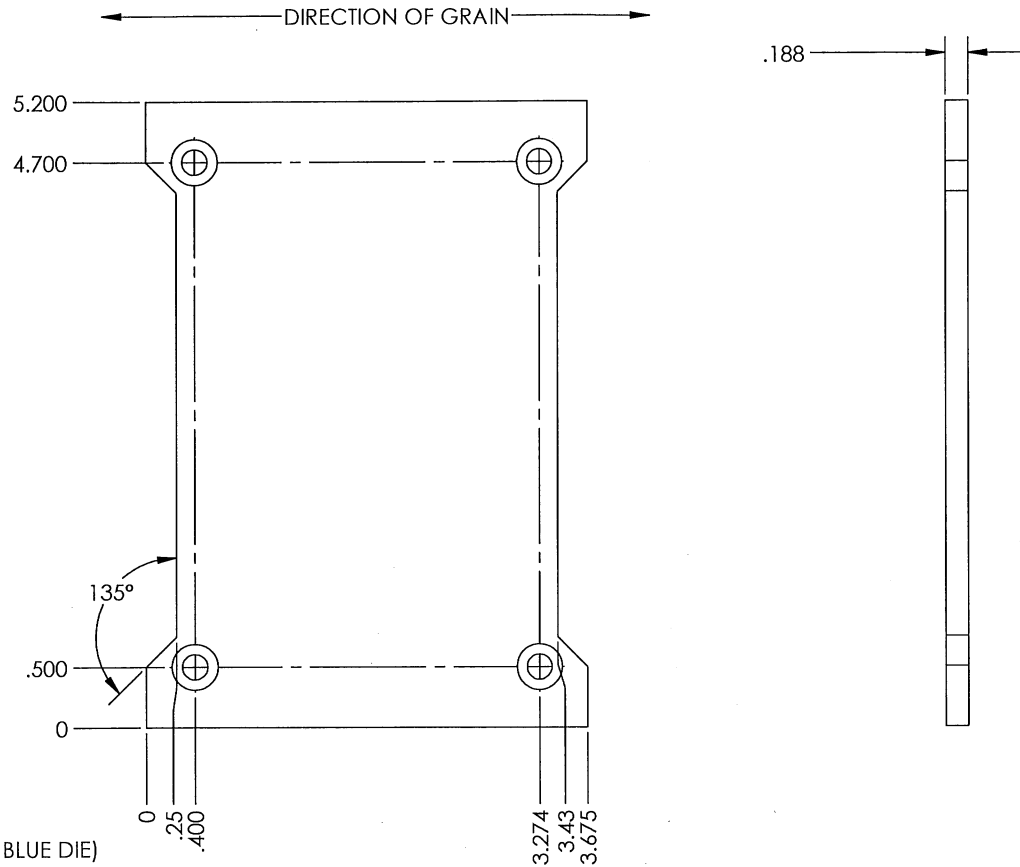

MATERIAL: ALUMINUM 5052-H32  
THICKNESS: 3/16"  
FINISH: TIME SAVED, DARK BLUE ANODIZED (15 MIN. IN BLUE DIE)

HOLES:  
0.210" DIA & C.S. 90°x 0.380" DIA QTY: 4  
ALL C.S. ON NEAR SIDE

REV	DESCRIPTION:	DATE	MUST BE RoHS COMPLIANT	DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMALS: XXX ± 0.008" XX ± 0.012"	THIS DOCUMENT IS THE PROPERTY OF ABSOPULSE ELECTRONICS LTD. ITS CONTENTS ARE PROPRIETARY AND MAY NEITHER BE COPIED, REPRODUCED NOR ITS CONTENTS DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN AGREEMENT FROM ABSOPULSE ELECTRONICS LTD.	Title: Connection Bracket				ABSOPULSE
A	NEW ISSUE	10/02/2012		ANGLES: ± 2° FRACTIONS: ± 1/64" UNLESS OTHERWISE STATED		Part of: 3U2 & 3U3 to 19" with 998754SP1	Date: Oct.02, 2012		Revision: 1	
			EDGES & HOLES DEBURRED SURFACES FREE OF SCRATCHES		Drawn by: R.N.	Checked by:	Approved by:			